



PRICE PUMP®


XT100/150/200

PUMP VOLUTE / IMPELLER MATERIALS

- XT (AI) – CAST IRON / CAST IRON
- XT (BF) – CAST IRON / BRONZE
- XT (SF) – CAST IRON / 316SS
- XT (AB) – BRONZE / BRONZE
- XT (SS) – 316SS / 316SS

APPLICATIONS

- WASTE WATER TREATMENT
- HOT SOLVENTS
- DEIONIZED WATER
- CHEMICAL PROCESS
- PLATING EQUIPMENT
- AGRICULTURAL CHEMICALS

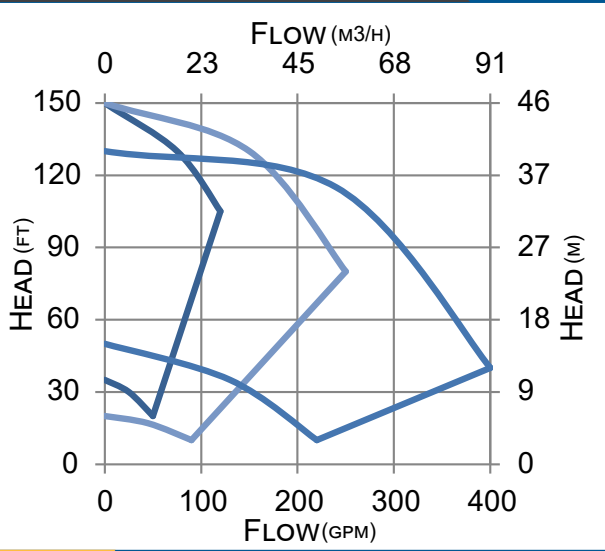

STANDARD SPECIFICATIONS

- XT100 / XT100V DISCHARGE 1" FNPT, SUCTION 1-1/2" FNPT
- XT150 / XT150V DISCHARGE 1-1/2" FNPT, SUCTION 2" FNPT
- XT200 / XT200V DISCHARGE 2" FNPT, SUCTION 3" FNPT
- MAXIMUM IMPELLER DIAMETER: 5.98"
- SHAFT SLEEVE: 316SS
- MOTOR: NEMA JM FACE (MULTIPLE ENCLOSURES AVAILABLE)
- PUMP ENERGY INDEX: .933-.995

MECHANICAL SEAL TYPES


- SINGLE, 1-1/2" TYPE 21 BUNA, CARBON VS. CERAMIC (AI, BF, SF, AB)
- SINGLE, 1-1/2" TYPE 21 VITON, CARBON VS. CERAMIC (SS)
- NOTE: ADDITIONAL SEAL OPTIONS AVAILABLE
- GASKET: SYN. FIBER (AI, BF, AB, SF) AND PTFE (SS)

FEATURES

- PUMP DESIGN – COMPACT, CLOSE COUPLED
- DOUBLE SEAL – TYPE 9 & 21 AVAILABLE
- HIGH PRESSURE OPTION – 300 PSI MAXIMUM
- TEFLON SEAL – TYPE 9 AVAILABLE
- FLUSH OPTIONS – RECIRCULATING & QUENCH AVAILABLE

OPTIONAL CONFIGURATIONS

- AIR MOTOR: UP TO 5 HP
- VERTICAL MOUNTING
- POWER FRAME MOUNTING
- LONG-COUPLED MOUNTING

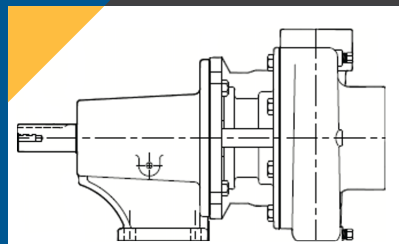

2203 SMEED PARKWAY CALDWELL, ID 83605

MAIN (208) 402-6871

TOLL FREE (800) 345-7867


EMAIL SALES@PRICEPUMP.COM

PRICEPUMP.COM





XT100/150/200

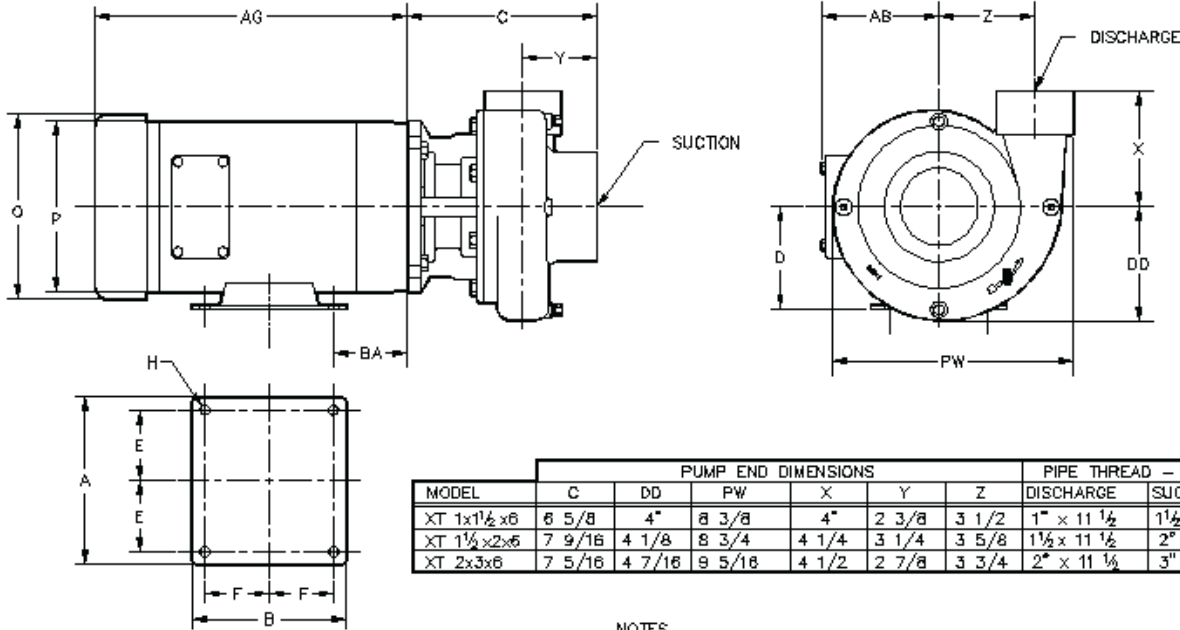

MODEL	PUMP END DIMENSIONS						PIPE THREAD - NPT	
	C	DD	PW	X	Y	Z	DISCHARGE	SUCTION
XT 1x1½x6	6 5/8	4"	8 3/8	4"	2 3/8	3 1/2	1" x 11 1/2	1½" x 11 1/2
XT 1½x2x6	7 9/16	4 1/8	8 3/4	4 1/4	3 1/4	3 5/8	1½" x 11 1/2	2" x 11 1/2
XT 2x3x6	7 5/16	4 7/16	9 5/16	4 1/2	2 7/8	3 3/4	2" x 11 1/2	3" x B

NOTES
ALL DIMENSIONS ARE ROUNDED TO THE NEAREST 1/8 INCH.

HP	RPM	FRM	JM MOTOR END DIMENSIONS								ODP		TEFC & EXP. PRF				
			A	B	D	E	F	H	BA	O	P	AB	AG	AB	AG		
1 1/2	3600	143JM					2										
2	3600	145JM	6-1/2	5-15/16	3-1/2	2-3/4	2-1/2	11/32	2-7/8	6-7/8	6-5/8	5-1/4	8-3/4	6-3/4	11-1/4		
3	3600	145JM															
5	3600	182JM	8-1/2	6-1/2	4-1/2	3-3/4	2-1/4	13/32	3-1/2	6-7/16	7-7/8	5-7/8	11-1/8	7-3/8	14-3/4		
7 1/2	3600	184JM					2-3/4										
1D	3600	213 (W/ 184 FACE)	9-1/2	B	5-1/4	4-1/4	3-1/2	13/32	3-1/8	10-1/16	9-9/16	N/A		7-3/8	14-7/16		
1S	3600	213 (W/ 184 FACE)															

NOTE: MOTOR DIMENSIONS WILL VARY BY MODEL AND MAKE. DIMENSIONS ARE TO BE USED FOR REFERENCE ONLY.

DIMENSIONS

MATERIALS OF CONSTRUCTION					
XT	AI	BF	AB	SF	SS
VOLUTE	CAST IRON	CAST IRON	BRONZE	CAST IRON	316SS
IMPELLER	CAST IRON	BRONZE	BRONZE	316SS	316SS
BRACKET	CAST IRON	CAST IRON	BRONZE	CAST IRON	316SS
GASKET	SYN. FIBER	SYN. FIBER	SYN. FIBER	SYN. FIBER	TEFLON
FASTENERS	STEEL PLATED	STEEL PLATED	18-8 SS	STEEL PLATED	316 SS

*TEMPERATURE LIMITS ARE BASED ON STANDARD SEAL AND GASKET MATERIALS, AND WILL VARY ACCORDING TO THE LIQUID BEING PUMPED

TECHNICAL INFORMATION		
MAX FLOW	(XT100)	120 GPM (27 M3/HR)
MAX FLOW	(XT150)	250 GPM (57 M3/HR)
MAX FLOW	(XT200)	400 GPM (95 M3/HR)
MAX HEAD		150 FEET (46 M)
MIN. FLOW	(XT100)	10 GPM (2.3 M3/HR)
MIN. FLOW	(XT150)	35 GPM (7.9 M3/HR)
MIN. FLOW	(XT200)	50 GPM (11.4 M3/HR)
MAX SOLID SIZE	(XT100)	0.120" (3.0 MM)
MAX SOLID SIZE	(XT150)	0.190" (4.8 MM)
MAX SOLID SIZE	(XT200)	0.250" (6.4 MM)
MAX WORKING PRESSURE	(TYPE 8 SEAL)	325 PSI (22.4 BAR)
	(TYPE 9 SEAL)	350 PSI (24.1 BAR)
	(TYPE 21 SEAL)	150 PSI (10.3 BAR)
	(TYPE 2 SEAL)	300 PSI (20.6 BAR)
MAX TEMP.		300°F (149°C)*

