




MAXI-DEPTH: WOUND FILTER CARTRIDGES

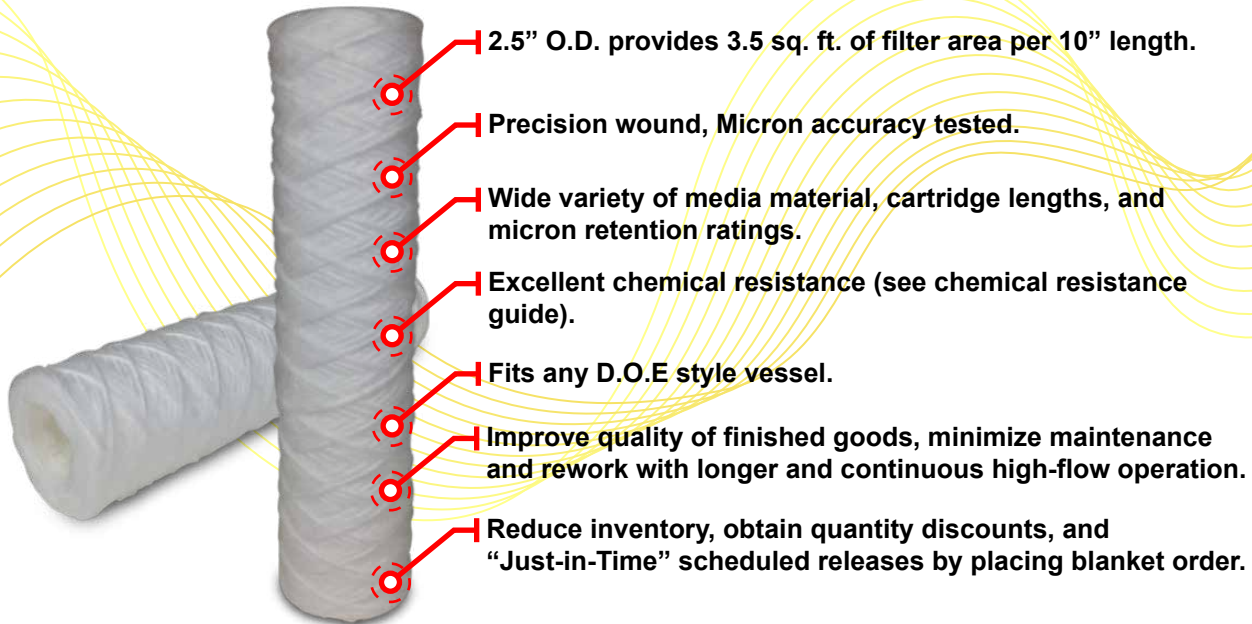

MAXI-DEPTH WOUND FILTER CARTRIDGE

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
01U10U	1	10"	30
01U20U	1	20"	15
01U30U	1	30"	15
003U4U	3	4"	60
003U6U	3	6"	30
03U10U	3	10"	30
03U20U	3	20"	15
03U30U	3	30"	15
03U40U	3	40"	10
005U4U	5	4"	60
05U10U	5	10"	30
05U20U	5	20"	15
05U30U	5	30"	15
05U40U	5	40"	10
010U4U	10	4"	60
010U6U	10	6"	30
10U10U	10	10"	30
10U20U	10	20"	15
10U30U	10	30"	15
015U4U	15	4"	60
015U6U	15	6"	30
15U10U	15	10"	30
15U20U	15	20"	15
15U30U	15	30"	15
15U40U	15	40"	10

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
20U10U	20	10"	30
20U20U	20	20"	15
20U30U	20	30"	15
030U4U	30	4"	60
030U6U	30	6"	30
30U10U	30	10"	30
30U20U	30	20"	15
30U30U	30	30"	15
50U10U	50	10"	30
50U20U	50	20"	15
50U30U	50	30"	15
50U40U	50	40"	10
75U10U	75	10"	30
75U20U	75	20"	15
75U30U	75	30"	15
99U10U	100	10"	30
99U20U	100	20"	15
99U30U	100	30"	15
99U40U	100	40"	10



MAXI-DEPTH: WOUND FILTER CARTRIDGES

BLEACHED COTTON w/ TINNED STEEL CORE

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
05C10T	5	10"	30
05C20T	5	20"	15
05C30T	5	30"	15
10C10T	10	10"	30
10C20T	10	20"	15
10C30T	10	30"	15
15C10T	15	10"	30
15C20T	15	20"	15
15C30T	15	30"	15
15C40T	15	40"	10
20C10T	20	10"	30
20C20T	20	20"	15
20C30T	20	30"	15
30C10T	30	10"	30
30C20T	30	20"	15
30C30T	30	30"	15
50C10T	50	10"	30
50C20T	50	20"	15
50C30T	50	30"	15
50C40T	50	40"	10
75C10T	75	10"	30
75C20T	75	20"	15
75C30T	75	30"	15
75C40T	75	40"	10
99C10T	100	10"	30
99C20T	100	20"	15
99C30T	100	30"	15

BLEACHED COTTON w/ 316SS CORE

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
05C10S	5	10"	30
05C20S	5	20"	15
05C30S	5	30"	15
10C10S	10	10"	30
10C20S	10	20"	15
10C30S	10	30"	15
10C40S	10	40"	10
15C10S	15	10"	30
15C20S	15	20"	15
15C30S	15	30"	15
15C40S	15	40"	10
20C10S	20	10"	30
20C20S	20	20"	15
20C30S	20	30"	15
30C10S	30	10"	30
30C20S	30	20"	15
30C30S	30	30"	15
50C10S	50	10"	30
50C20S	50	20"	15
50C30S	50	30"	15
50C40S	50	40"	10
75C10S	75	10"	30
75C20S	75	20"	15
75C30S	75	30"	15
99C10S	100	10"	30
99C20S	100	20"	15
99C30S	100	30"	15
99C40S	100	40"	10

UNBLEACHED COTTON w/ TINNED STEEL CORE

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
05B10T	5	10"	30
05B20T	5	20"	15
05B30T	5	30"	15
05B40T	5	40"	10
10B10T	10	10"	30
10B20T	10	20"	15
10B30T	10	30"	15
10B40T	10	40"	10
15B10T	15	10"	30
15B20T	15	20"	15
15B30T	15	30"	15
15B40T	15	40"	10
20B10T	15	10"	30
20B20T	15	20"	15
20B30T	15	30"	15
30B10T	30	10"	30
30B20T	30	20"	15
30B30T	30	30"	15
50B10T	50	10"	30
50B20T	50	20"	15
50B30T	50	30"	15
50B40T	50	40"	10
75B10T	75	10"	30
75B20T	75	20"	15
75B30T	75	30"	15
99B10T	100	10"	30
99B20T	100	20"	15
99B30T	100	30"	15

UNBLEACHED COTTON w/ 316SS CORE

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
05B10S	5	10"	30
05B20S	5	20"	15
05B30S	5	30"	15
10B10S	5	10"	30
10B20S	5	20"	15
10B30S	5	30"	15
15B10S	15	10"	30
15B20S	15	20"	15
15B30S	15	30"	15
20B10S	20	10"	30
20B20S	20	20"	15
20B30S	20	30"	15
30B10S	30	10"	30
30B20S	30	20"	15
30B30S	30	30"	15
50B10S	50	10"	30
50B20S	50	20"	15
50B30S	50	30"	15
75B10S	75	10"	30
75B20S	75	20"	15
75B30S	75	30"	15
99B10S	100	10"	30
99B20S	100	20"	15
99B30S	100	30"	15



MAXI-DEPTH: WOUND FILTER CARTRIDGES

BLEACHED COTTON w/ POLYPROPYLENE CORE

Free of "sizing" and yarn "finish" substances.
Meets FDA regulations for potable water.

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
001C4U	1	4"	60
001C6U	1	6"	30
01C10U	1	10"	30
01C20U	1	20"	15
01C30U	1	30"	15
003C6U	3	6"	30
03C10U	3	10"	30
03C20U	3	20"	15
03C30U	3	30"	15
03C40U	3	40"	10
05C10U	5	10"	30
05C20U	5	20"	15
05C30U	5	30"	15
010C6U	10	6"	30
10C10U	10	10"	30
10C20U	10	20"	15
10C30U	10	30"	15
015C4U	15	4"	60
015C6U	15	6"	30
15C10U	15	10"	30
15C20U	15	20"	15
15C30U	15	30"	15
15C40U	15	40"	10
20C10U	20	10"	30
20C20U	20	20"	15
20C30U	20	30"	15
030C6U	30	6"	30
30C10U	30	10"	30
30C20U	30	20"	15
30C30U	30	30"	15
50C10U	50	10"	30
50C20U	50	20"	15
50C30U	50	30"	15
50C40U	50	40"	10
75C10U	75	10"	30
75C20U	75	20"	15
75C30U	75	30"	15
99C10U	100	10"	30
99C20U	100	20"	15
99C30U	100	30"	15

POLYESTER w/ POLYPROPYLENE CORE

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
01K10U	1	10"	30
01K30U	1	30"	15
05K20U	5	20"	15
05K30U	5	30"	15
10K10U	5	10"	30
10K30U	5	30"	15
15K30U	15	30"	15
20K30U	20	30"	15
30K30U	30	30"	15



PUREFYBE: DEPTH CARTRIDGES with Ultra-Pure Fibers



High-Quality Polypropylene windings, with Polypropylene core.

Precision wound, depth filtration cartridges.

No pre-wash required.

Available from 1 - 100 micron ratings.

Nominal 2-3/8" O.D.

Continuous molded cores in 10", 20", 30" or 40" lengths.

Excellent temperature and chemical compatibility.

Economically priced.

PUREFYBE DEPTH WOUND® FILTER CARTRIDGES

Fibrillated Fiber on PP Core

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
01P10U	1	10"	30
01P20U	1	20"	15
01P30U	1	30"	15
01P40U	1	40"	10
03P10U	3	10"	30
03P20U	3	20"	15
03P30U	3	30"	15
03P40U	3	40"	10
05P10U	5	10"	30
05P20U	5	20"	15
05P30U	5	30"	15
05P40U	5	40"	10
10P10U	10	10"	30
10P20U	10	20"	15
10P30U	10	30"	15
10P40U	10	40"	10
15P10U	15	10"	30
15P20U	15	20"	15
15P30U	15	30"	15
15P40U	15	40"	10

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
20P10U	20	10"	30
20P20U	20	20"	15
20P30U	20	30"	15
25P10U	25	10"	30
25P20U	25	20"	15
25P30U	25	30"	15
50P10U	50	10"	30
50P20U	50	20"	15
50P30U	50	30"	15
50P40U	50	40"	10
99P10U	100	10"	30
99P20U	100	20"	15
99P30U	100	30"	15
99P40U	100	40"	10



PUREFYBE: DEPTH CARTRIDGES

DEPTH WOUND CARTRIDGES CONTINUED



HI-PERF FOR CHROMIC / SULFURIC/ NITRIC ACIDS

Constructed of proprietary materials which are specifically designed for chrome plating applications, nitric and sulfuric acid solutions. Equally well suited for aggressive solvents and bases.

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
05H10U	5	10"	30
05H20U	5	20"	15
05H30U	5	30"	15
05H40U	5	40"	10
15H10U	15	10"	30
15H20U	15	20"	15
15H30U	15	30"	15
15H40U	15	40"	10
30H10U	30	10"	30
30H20U	30	20"	15
30H30U	30	30"	15
30H40U	30	40"	10
50H10U	50	10"	30
50H20U	50	20"	15
50H30U	50	30"	15
50H40U	50	40"	10
99H10U	100	10"	30
99H20U	100	20"	15
99H30U	100	30"	15
99H40U	100	40"	10

GLASS FIBER on PP core

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
01G10UC	1	10"	30
01G20UC	1	20"	15
01G30UC	1	30"	15
01G40UC	1	40"	10
05G10UC	5	10"	30
05G20UC	5	20"	15
05G30UC	5	30"	15
05G40UC	5	40"	10
10G10UC	10	10"	30
10G20UC	10	20"	15
10G30UC	10	30"	15
10G40UC	10	40"	10
20G10UC	20	10"	30
20G20UC	20	20"	15
20G30UC	20	30"	15
20G40UC	20	40"	10
50G10UC	50	10"	30
50G20UC	50	20"	15
50G30UC	50	30"	15
50G40UC	50	40"	10

Cartridges resist all strong oxidizing acids except Hydrofluoric. Especially suitable for for chromic acid and chrome etch. Glass fiber cartridges can be used at higher temperatures than other fiber type media. Cartridges are unbaked on a polypropylene core and include a woven glass fiber core cover (Max 200°C). 2-1/2" Nominal Diameter

GLASS FIBER on PVDF core

MODEL	MICRON RATING	NOMINAL LENGTH	CARTON QUANTITY
01G10KC	1	10"	30
01G20KC	1	20"	15
01G30KC	1	30"	15
01G40KC	1	40"	10
05G10KC	5	10"	30
05G20KC	5	20"	15
05G30KC	5	30"	15
05G40KC	5	40"	10
10G10KC	10	10"	30
10G20KC	10	20"	15
10G30KC	10	30"	15
10G40KC	10	40"	10
20G10KC	20	10"	30
20G20KC	20	20"	15
20G30KC	20	30"	15
20G40KC	20	40"	10
50G10KC	50	10"	30
50G20KC	50	20"	15
50G30KC	50	30"	15
50G40KC	50	40"	10

Cartridges resist all strong oxidizing acids except Hydrofluoric. Especially suitable for for chromic acid and chrome etch. Glass fiber cartridges can be used at higher temperatures than other fiber type media. Cartridges are unbaked on a polypropylene core and include a woven glass fiber core cover (Max 200°C). 2-1/2" Nominal Diameter



MAXI-WIND: 4" DIAMETER



- Dirt holding capacity to 10 sq. ft. of surface filtration.**
- Designed for maximum solids loading at a flow rate of 10 U.S. GPM.**
- For model GPO-10-1 filter chambers.**
- Serves as viable replacement for original equipment cartridges.**

POLYPROPYLENE w/ POLYPROPYLENE CORE

For good chemical resistance

MODEL	MICRON RATING	CARTON QUANTITY*
0.5U9.8U4	.5	10
1U9.8U4	1	10
5U9.8U4	5	10
10U9.8U4	10	10

*Minimum order carton of 10.

PUREFYBE® (Fibrillated polypropylene) w/ POLYPROPYLENE CORE

Wound of fibers free of "sizing" and yarn "finish" substances

MODEL	MICRON RATING	CARTON QUANTITY*
5P9.8U4	5	10
10P9.8U4	10	10
25P9.8U4	25	10
50P9.8U4	50	10
99P9.8U4	100	10

*Minimum order carton of 10.



- Dirt holding capacity to 18 sq. ft. of surface filtration.**
- Designed for maximum solids loading at a flow rate of 18 U.S. GPM.**
- For model 718 Chambers and CB Filtration Chambers.**
- Serves as viable replacement for original equipment cartridges.**

4" DIAMETER x 18" LONG

Maxi-Wind cartridges provide extended solids loading at greater efficiency. Dirt holding capacity is equivalent to 18 sq ft. (1.67m2) of surface filtration. Designed for maximum solids loading at a recommended flow rate of 18 GPM (68 LPM).
For model CP filtration chambers and replacement OE cartridges.

UNBLEACHED COTTON FOR OILS, SOLVENTS, AND SEMI-AQUEOUS CLEANERS

MODEL	MICRON RATING	CARTON QUANTITY*
1B18A4	1	5
3B18A4	3	5
5B18A4	5	5
10B18A4	10	5
20B18A4	20	5
30B18A4	30	5

*Minimum order carton of 5.

POLYPROPYLENE FOR GOOD CHEMICAL RESISTANCE

MODEL	MICRON RATING	CARTON QUANTITY*
1U18A4	1	5
3U18A4	3	5
5U18A4	5	5
10U18A4	10	5
20U18A4	20	5
30U18A4	30	5

*Minimum order carton of 5.



MEDIA USED PER CHAMBER / SYSTEM

TYPE	FLOW RATE (GPH)	DOE CARTRIDGE	SOE CARTRIDGE	DISC	BAG	CARBON	Ø6" PLEATED CARTRIDGES
'L'	Up to 2,000	✓	✓		✓	✓	
'S'	Up to 4,000	✓	✓	✓	✓	✓	
'G'	Up to 7,500	✓	✓	✓	✓	✓	
'JM'	2,200 to 5,400	✓	✓	✓	✓	✓	✓
'HM'	Up to 3,200		✓				✓
'PLB'	Up to 9,000		✓				✓
'FM'	5,400 to 9,400	✓	✓	✓		✓	✓
MEGA FLO	6,000 to 30,000	✓	✓	✓		✓	✓
GUARDIAN	3,500 to 8,500	✓	✓	✓	✓	✓	✓



'L'



'S'



'G'



'JM'



'HM'



'PLBHE'



'FM'



'MEGA-FLO'



'GUARDIAN'