



SERFILCO®

Chemical resistant pumps & filters engineered for industry

SERIES 'DP': DRUM PUMPS

Heavy Duty 1.1 HP Electric Motors (open or TEFC)
With variable speed control for precise delivery without splashback.
Explosion Proof, Air Driven Motors Available

Easy Fit Hand Wheel Connection
Facilitates interchangeability with pumps and motors from other manufacturers.

Batch Controllers Available
For Precise Pumping of Fluids and Chemicals.
See *Bulletin P-412*

Multiple Barrel Adapters / Fume Barriers Available
PP - NPT, PP - Buttress Thread, 316SS - NPT.

Pump Tubes:
Available in Polypropylene, High-Temp Polypro, CPVC, pure PVDF, 316 SS or Aluminum.

Various Lengths:
Available in 27", 39", 47", 60", 72".




Fill Your Tank,
Empty a 50 gal. Drum,
or Fill a Cup of Coffee

Delivery Nozzle Provides
Safe, One-Man Operation

**SAFETY
FIRST**

Wall-Bracket





SERIES 'DP': DRUM PUMPS



PUMP PACKAGE 1 | Water Treatment Chemicals

Engineered to transfer corrosive chemicals associated with the Water Treatment industry. Common applications include: Sodium Hypochlorite, Potassium Hydroxide and Sodium Bromide.

Motor Type:	ODP-S
Pump Assembly:	CPVC
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) PVC
Dispensing Nozzle:	1" (25.4mm), Polypropylene
Barrel Adapter:	Polypropylene
Storage Bracket:	Steel
Max. Flow Rate:	15 GPM ((57 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	1500 cps (mPas)
Max. Temperature:	190°F (88°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9430	115V	39"
52-9431	240V	
52-9432	115V	47"
52-9433	240V	



PUMP PACKAGE 2 | Acids & Alkalis

Engineered to transfer corrosive liquids. Common applications include: Hydrochloric Acid, Nitric Acid (20%), Acetic Acid and Sulfuric Acid.

Motor Type:	ODP-S
Pump Assembly:	Polypropylene
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) PVC
Dispensing Nozzle:	1" (25.4mm), Polypropylene
Barrel Adapter:	Polypropylene
Storage Bracket:	Steel
Max. Flow Rate:	15 GPM ((57 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	1500 cps (mPas)
Max. Temperature:	130°F (55°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9400	115V	39"
52-9401	240V	
52-9402	115V	47"
52-9403	240V	



PUMP PACKAGE 3 | Concentrated Acids & Alkalis

Engineered to transfer very concentrated and extremely aggressive liquids. Common applications include: Sulfuric Acid 66 Baumè, Propionic Acid, Concentrated Nitric (98%) and Hydrofluoric Acid.

Motor Type:	ENC-S
Pump Assembly:	PVDF (Kynar)
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) Goodyear® Viper 16™
Dispensing Nozzle:	1" (25.4mm), PVDF
Barrel Adapter:	Polypropylene
Storage Bracket:	Steel
Max. Flow Rate:	17.5 GPM ((66 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	1500 cps (mPas)
Max. Temperature:	175°F (80°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9420	115V	39"
52-9421	240V	
52-9422	115V	47"
52-9423	240V	



SERIES 'DP': DRUM PUMPS



PUMP PACKAGE 4 | Acids & Alkalis Measurement

Engineered to transfer corrosive chemicals associated with the Water Treatment Industry. Common applications include: Sodium Hypochlorite, Potassium Hydroxide and Sodium Bromide.

Motor Type:	ODP-S
Pump Assembly:	Polypropylene
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) PVC
Dispensing Nozzle:	1" (25.4mm), Polypropylene
Flow Meter:	Digital / Polypropylene totalizer
Barrel Adapter:	Polypropylene
Storage Bracket:	Steel
Max. Flow Rate:	13.5 GPM ((51 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	300 cps (mPas)
Max. Temperature:	130°F (55°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9500	115V	39"
52-9501	240V	
52-9502	115V	47"
52-9503	240V	



PUMP PACKAGE 5 | Concentrated Acids & Alkalis Measurement

Unique design allows operators to safely measure and transfer concentrated and very aggressive liquids. Common applications include: Sulfuric Acid 66 Baumè, Propionic Acid, Concentrated Nitric (98%), and Hydrofluoric Acid.

Motor Type:	ENC-S
Pump Assembly:	PVDF
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) Goodyear® Viper 16™
Dispensing Nozzle:	1" (25.4mm), PVDF
Flow Meter:	Digital / PVDF totalizer
Barrel Adapter:	Polypropylene
Storage Bracket:	Steel
Max. Flow Rate:	16 GPM ((61 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	300 cps (mPas)
Max. Temperature:	175°F (80°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9510	115V	39"
52-9511	240V	
52-9512	115V	47"
52-9513	240V	



PUMP PACKAGE 6 | Mineral Acids

Engineered to transfer mineral acids and suitable chemicals. Applications include: Light machining oils, transmission fluid, etc.

Motor Type:	ODP-S
Pump Assembly:	SS 316
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) PVC
Dispensing Nozzle:	1" (25.4mm), SS 316
Barrel Adapter:	Stainless Steel
Storage Bracket:	Steel
Max. Flow Rate:	22 GPM ((83 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	1500 cps (mPas)
Max. Temperature:	175°F (80°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9414	115V	39"
52-9415	240V	
52-9416	115V	47"
52-9417	240V	



SERIES 'DP': DRUM PUMPS



PUMP PACKAGE 7 | Non-Corrosive Liquids

Engineered to transfer light oils, automotive fluids and lubricants. Applications include: Light machining oils, hydraulic fluid, motor oil, antifreeze, lubricating oil etc.

Motor Type:	ODP-S
Pump Assembly:	Aluminum
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) PVC
Dispensing Nozzle:	1" (25.4mm), Polypropylene
Barrel Adapter:	Stainless Steel
Storage Bracket:	Steel
Max. Flow Rate:	22 GPM ((83 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	1500 cps (mPas)
Max. Temperature:	175°F (80°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9460	115V	39"
52-9461	240V	
52-9462	115V	47"
52-9463	240V	



PUMP PACKAGE 8 | Flammable and Combustible Liquids



Explosion Proof Drum Pump (Air) is a safe solution for transferring flammable or combustible liquids and meets the safety requirements of the Chemical Processing Industry. Applications include: Alcohol, Isopropyl Ether, Gasoline, Solvents, Aqueous Ammonia, Petroleum Products, Xylene, Toluene.

Motor Type:	AIR (B)
Pump Assembly:	SS 316
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) Solvent Hose
Dispensing Nozzle:	1" (25.4mm), SS 316
Barrel Adapter:	Stainless Steel
Storage Bracket:	Steel
Max. Flow Rate:	30 GPM ((114 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	450 cps (mPas)
Max. Temperature:	175°F (80°C)

PRICE CODE NUMBER	LENGTH
52-9604	39"
52-9606	47"



PUMP PACKAGE 9 | Flammable and Combustible Liquids



Engineered to transfer mineral acids and suitable chemicals. Applications include: light machining oils, transmission fluid, etc.

Motor Type:	EXP (IP 54)
Pump Assembly:	SS 316
Pump Length:	39" (1000mm) OR 47" (1200mm)
Hose:	6 ft. (1.8m), I.D., 1" (25.4mm) Solvent Hose
Dispensing Nozzle:	1" (25.4mm), SS 316
Barrel Adapter:	Stainless Steel
Storage Bracket:	Steel
Max. Flow Rate:	30 GPM ((114 LPM) Based on Water)
Max. Pressure:	35 ft. (10.6m)
Max. Viscosity:	300 cps (mPas) 115V 750 cps (mPas) 240V
Max. Temperature:	175°F (80°C)

PRICE CODE NUMBER	VOLTAGE	LENGTH
52-9910	115V	39"
52-9911	240V	
52-9912	115V	47"
52-9913	240V	



SERIES 'DP': DRUM PUMPS

ORDER INFORMATION

PP: Polypropylene Applications

Most chemically aggressive liquids such as acids, salt solutions, and solutions which corrode or oxidize metals, such as hydrofluoric or sulfuric acid.

Maximum liquid temperature: 130°F (54°C)

⚠ NOT FOR USE WITH FLAMMABLE LIQUIDS.

CK: CPVC / PVDF Applications

Used for pumping aggressive solutions such as sodium hypochlorite or for higher temperature applications where polypropylene is not suitable.

Maximum liquid temperature: 190°F (90°C)

⚠ NOT FOR USE WITH FLAMMABLE LIQUIDS.

KY: PVDF Applications

Capable of pumping highly aggressive solutions which are not compatible with other thermoplastics.

Maximum liquid temperature: 175°F (80°C)

⚠ NOT FOR USE WITH FLAMMABLE LIQUIDS.

SS316: 316 Stainless Applications

Most solvents and organic acids, as well as salt solutions, nitrous acids, dyes, all alkalies and potable liquids. All components are polished for a quality finish.

Maximum liquid temperature: 175°F (80°C)

⚠ WARNING: When pumping flammable or combustible liquids, pump tube must be used in conjunction with an explosion proof motor.

PPP: High-Temp Poly Applications

Engineered for transferring high temperature corrosive liquids. Robust PPP Polypropylene ensures chemical resistance and excellent heat deflection against light to mildly aggressive liquids.

Maximum liquid temperature: 175°F (80°C)

⚠ NOT FOR USE WITH FLAMMABLE LIQUIDS.

AL: Aluminum Applications

For transferring non-corrosive liquids such as machining lubricants and light oils.

Maximum liquid temperature: 175°F (80°C)

⚠ WARNING: When pumping flammable or combustible liquids, pump tube must be used in conjunction with an explosion proof motor.

POLYPROPYLENE DRUM PUMPS

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
PP8327-1	52-1008	Polypropylene w/ Hastelloy [®] C276, PTFE Carbon	27" (690mm)	1.61" (41mm)	1.0" (25.4mm)
PP8339-1	52-1000		39" (1000mm)		
PP8347-1	52-1001		47" (1200mm)		
PP8360-1	52-1003		60" (1525mm)		
PP8372-1	52-1005		72" (1825mm)		

CPVC / PVDF DRUM PUMPS

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
CK8327-1	52-5200	CPVC and PVDF w/ Hastelloy [®] C276, PTFE Carbon	27" (690mm)	1.61" (41mm)	1.0" (25.4mm)
CK8339-1	52-5201		39" (1000mm)		
CK8347-1	52-5202		47" (1200mm)		
CK8360-1	52-5203		60" (1525mm)		
CK8372-1	52-5204		72" (1825mm)		

PVDF DRUM PUMPS

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
KY8327-1	52-4004	Natural PVDF w/ Hastelloy [®] C276, PTFE Carbon	27" (690mm)	1.61" (41mm)	1.0" (25.4mm)
KY8339-1	52-4000		39" (1000mm)		
KY8347-1	52-4001		47" (1200mm)		
KY8360-1	52-4002		60" (1525mm)		
KY8372-1	52-4003		72" (1825mm)		

STAINLESS STEEL DRUM PUMPS

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
SS8339-1	52-2050-39	316 Stainless Steel, PTFE, Carbon	39" (1000mm)	1.65" (42mm)	1.0" (25.4mm)
SS8347-1	52-2050-47		47" (1200mm)		
SS8360-1	52-2050-60		60" (1525mm)		
SS8372-1	52-2050-72		72" (1825mm)		

HIGH-TEMP POLY DRUM PUMPS

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
PPP8339-1	52-6001	High-Temp PP w/ Hastelloy [®] C276, PTFE Carbon	39" (1000mm)	1.61" (41mm)	1.0" (25.4mm)

ALUMINUM DRUM PUMPS

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
AL8327-1	52-7050-27	Aluminum 316SS PTFE, Carbon	27" (690mm)	1.65" (42mm)	1.0" (25.4mm)
AL8339-1	52-7050-39		39" (1000mm)		
AL8347-1	52-7050-47		47" (1200mm)		
AL8360-1	52-7050-60		60" (1525mm)		
AL8372-1	52-7050-72		72" (1825mm)		

* For high head pump - Add H to Model Number and Price Code Number
** For 3/4" hose connections, consult Sales Department

All pumps are provided with a 1" Stainless Steel Hose Clamp.
Stainless Steel Models also include bonding and grounding cables.

Registered Trademarks: • Viton - DuPont Dow Elastomers • Teflon - DuPont • Hastelloy - Haynes, International


PH: (800) 323-5431

EMAIL: SALES@SERFILCO.COM

SERFILCO.COM



SERIES 'DP': DRUM PUMPS

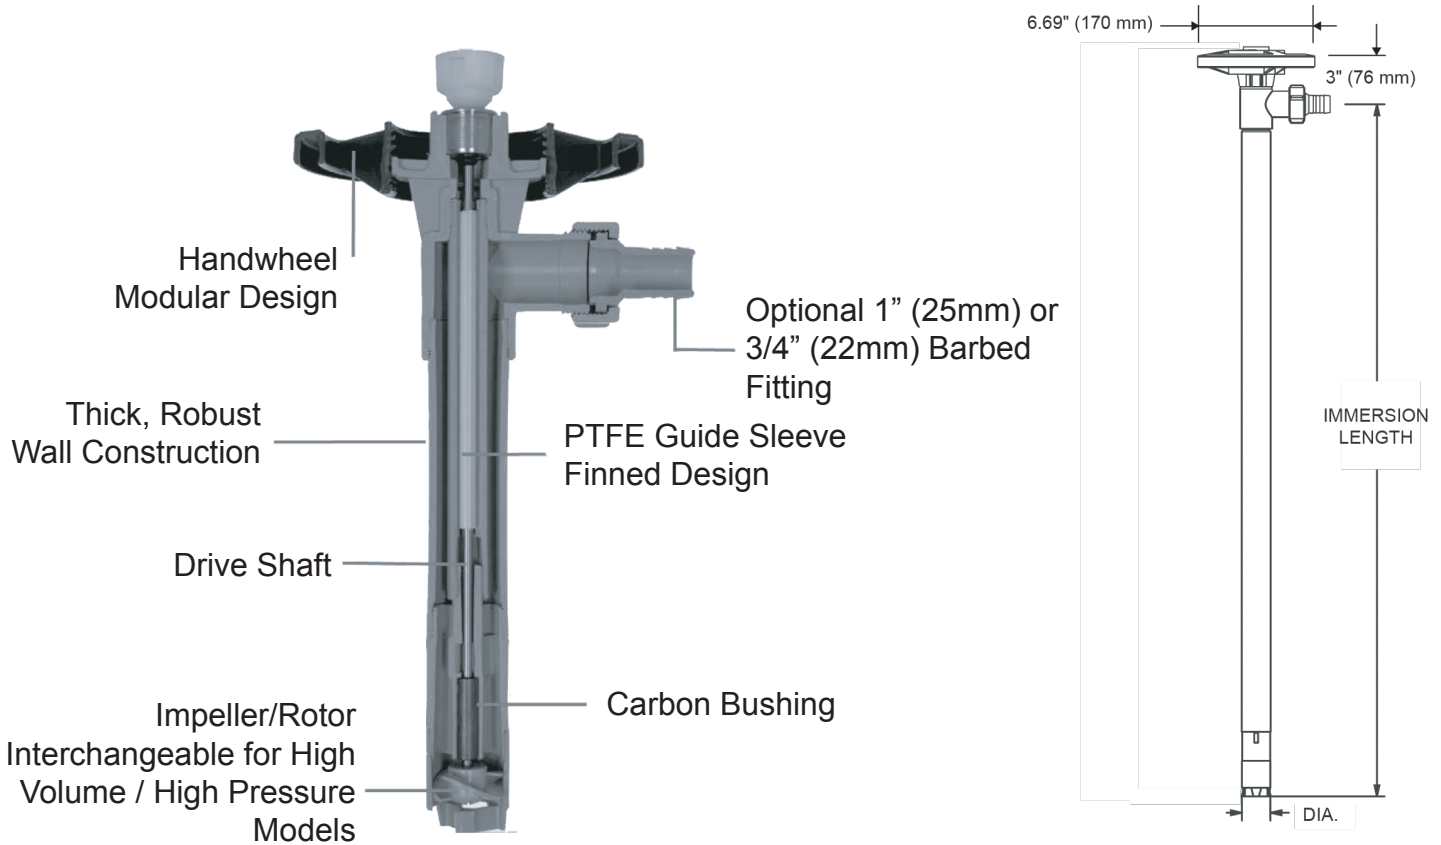

SA: SANITARY SERIES PUMP TUBES



The Sanitary Series pump is engineered to transfer low viscosity food products, pharmaceutical materials and personal care solutions from drums, ToteTanks® and kettles. The pumps' wetted components are constructed with FDA compliant materials which provide an ideal solution for sanitary applications.

Note: Pump is constructed of FDA compliant materials; however, the system does not have FDA Certification.

SANITARY PUMP TUBES

PUMP MODEL NUMBER	PRICE CODE NUMBER	MATERIALS OF CONSTRUCTION	IMMERSION LENGTH	DIA (Ø)	FOR HOSE SIZE**
SA8339-1	52-8200	316SS, PTFE,	39" (1000mm)	1.65"	1.0"
SA8347-1	52-8201	BUNA	47" (1200mm)	(42mm)	(25.4mm)

* For high head pump - Add 'H' to Model Number and Price Code No.

Maximum Viscosity: 1,000 CPS (mPAS)

Maximum Liquid Temp: 175°F (80°C)

Note: Pump is intended for intermittent use when operating at maximum viscosity



SERIES 'DP': DRUM PUMPS

DRUM PUMP MOTORS

Variable speed control

Unique drop-in brush system

Multi certified motors meet stringent North American and European standards

Powerful 1.1 hp (825 watt) Double insulated motors 115 / 220v models

Motor housing provides added chemical resistance

Optional thermal overload or low voltage release switches

UL US **SP** **CE** **AEx** **Ex**


ORDER INFORMATION

ODP-S: OPEN DRIP-PROOF MOTOR w/ SPEED CONTROL

1.1 HP (825 Watts) drip-proof motor in rugged glass reinforced plastic housing. Speed control knob allows for efficient, controlled liquid dispensing. Includes 16ft. cord w/ molded plug for viscosities up to 1500 cps, or S.G to 1.8. Weight: 8.8 lbs. (4kg)



MODEL NUMBER	PRICE CODE NO.	MOTOR VOLTAGE
ODP-S-115	52-8000	110-120V/1/50-60
ODP-S-240	52-8001	230-240V/V/50-60

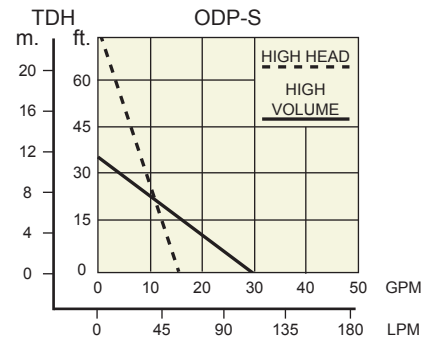


⚠ NOT SUITABLE FOR PUMPING FLAMMABLE OR COMBUSTIBLE FLUIDS

ENC-S: SEVERE DUTY TOTALLY ENCLOSED MOTOR w/ SPEED CONTROL

1.1 HP (825 Watts) totally enclosed motor in anodized aluminum housing for extra protection. Speed control knob allows for efficient, controlled liquid dispensing. Includes 16' cord w/ molded plug. For viscosities up to 1500 cps, or specific gravity up to 1.8.



MODEL NUMBER	PRICE CODE NO.	MOTOR VOLTAGE
ENC-S-115	52-3000	110-120V/1/50-60
ENC-S-240	52-3001	230-240V/V/50-60

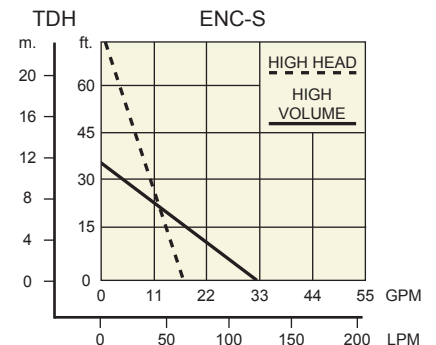

⚠ NOT SUITABLE FOR PUMPING FLAMMABLE OR COMBUSTIBLE FLUIDS



SERIES 'DP': DRUM PUMPS

ORDER INFORMATION cont.

EXP-UL EXPLOSION-PROOF MOTOR


.83 HP (620 watts input/450 watt output). Explosion-proof motor in aluminum housing. C.S.A. and U.L. listed Class 1, groups C and D. Thermal overload protection, automatic reset. Includes 16' cord, no plug. For Viscosities up to 750 cps, or S.G up to 1.8. includes grounding cable.

Weight: 20.0 lbs. (9.5kg)

MODEL NUMBER	PRICE CODE NO.	MOTOR VOLTAGE
EXP-UL-115	55-0744	120V/1/50-60



 SEE WARNING BELOW

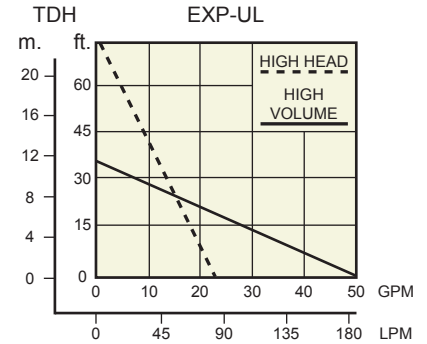

SP-430EX / SP-440EX EXPLOSION-PROOF MOTOR

SP-430EX
SP-440EX





Explosion proof (IP 55) Enclosure.
Thermal overload protection.
12' power cord, no plug.
Weight: 15 lbs. (6.8 kg)

SP-430EX: 1.3 HP (1000 watts), 0-12,000 RPM (Variable Speed)
SP-440EX: 1.3 HP (1000 watts), 0-12,000 RPM (Variable Speed)

MODEL NUMBER	PRICE CODE NO.	MOTOR VOLTAGE
SP-430EX	52-3102	110-120V/1/50-60Hz
SP-440EX	52-3103	220-240V/1/50-60Hz



 SEE WARNING BELOW

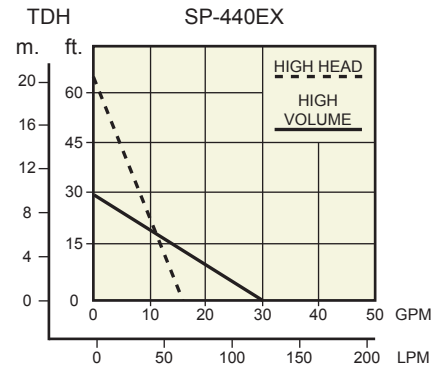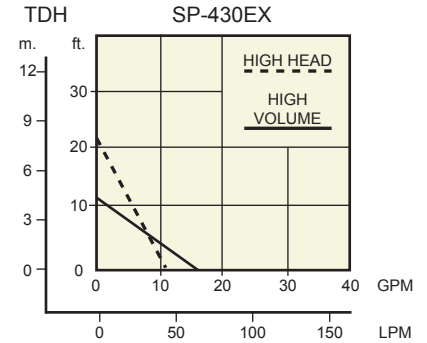

AIR (F)

AIR (F) AIR DRIVEN MOTOR




.73 HP (550 watts), 28 cu. ft./min. @ 90 PSI, 10,000 RPM. Aluminum motor housing is plastisol coated to prevent sparking. Includes muffler, filter, and trigger valve for flow control. For viscosities to 750 cps or specific gravity to 1.75. Air Line filter, PSI regulator, and automatic oiler recommended.

Weight: 3.5 lbs. (1.6 kg)

MODEL NUMBER	PRICE CODE NO.
AIR (F)	52-0100

 SEE WARNING BELOW

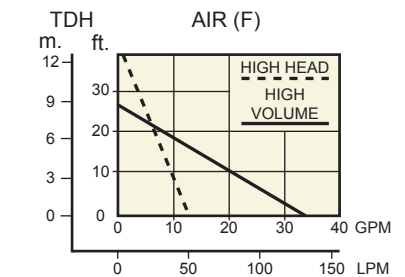

AIR (B)


AIR (B) AIR DRIVEN MOTOR




.5 HP (370 watts), 22 cu.ft./min. @ 90 PSI, 10,000 RPM. Aluminum motor housing, glass reinforced plastic pump mounting bracket. For viscosities to 450 cps or specific gravity up to 1.6. Muffler included. Weight: 3 lbs (1.4 kg).

MODEL NUMBER	PRICE CODE NO.
AIR (B)	55-0701

 SEE WARNING BELOW

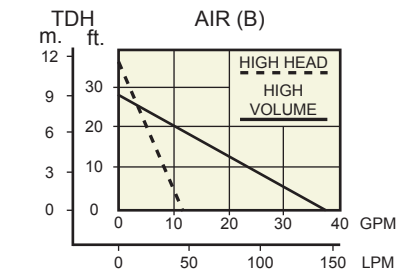

 WARNING: Pumping of flammables or combustible liquids can generate a static electric discharge, causing fire or explosion resulting in injury or death. Read and understand operating instructions before starting this unit. Follow all federal, state and local safety codes including NFPA30 - NFPA77. Prior to connecting to air supply, install bond and ground wires and check continuity of each wire. A meter reading of one ohm or less is required for safe liquid transfer. Use only metallic drum, receiving vessel and metallic pump (SP-6600 or SP-7600) when pumping flammables. Air motors are not recognized under any current Underwriter's Laboratory listing program. Consult a qualified engineer for suitability for use in a hazardous area or on flammables.




SERIES 'DP': DRUM PUMPS

LABORATORY DRUM PUMP



- Versatile and lightweight pump for the transfer of acids or alkalis from glass carboys and similar containers.
- Pump can handle liquids to 250 cps.
- Motor is 160 watt with built-in overload and manual reset for safety.
- Includes 16' cord with molded plug, 6' of 1/2" vinyl hose, and polypropylene flow nozzle.

- Ideal for low volume transfer
- Polypropylene
- 27" or 39" lengths

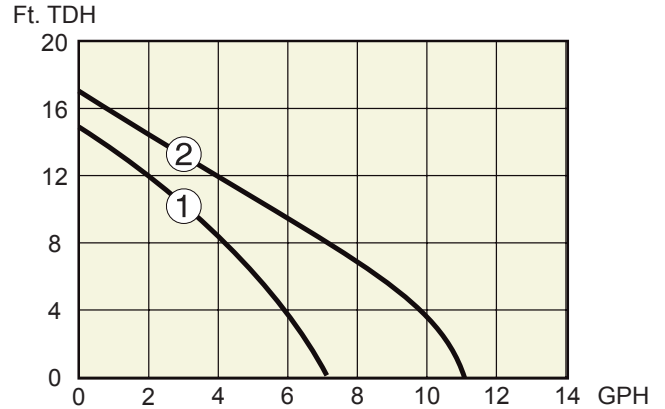

MODEL NO.	PRICE CODE NO.	CURVE	CONSTRUCTION MATERIALS	LENGTH (Inches)	ØDIA	HOSE (Inches)	MAX TEMP °F	WATT MOTOR	WEIGHT (LBS)
PP8327-1-110	55-9000	1	Carbon Viton® Ceramic ETFE Hastelloy®C	27"	1	1/2 - 3/4	115	110V/1/50-60	9.5
PP8327-2-110	55-9001	2			1-1/4			110V/1/50-60	
PP8327-2-220	55-9002	2			1-1/4			220V/1/50-60	
PP8339-1-110	55-9003	1		39"	1	1/2 - 3/4		110V/1/50-60	10
PP8339-1-220	55-9004	1			1			220V/1/50-60	
PP8339-2-110	55-9005	2			1-1/4			110V/1/50-60	
PP8339-2-220	55-9006	2	1-1/4		220V/1/50-60				

ACCESSORIES

GROUND-BOND CABLE KIT

When pumping flammable or combustible liquids from one container to another, both containers must be effectively bonded and grounded to prevent discharge of sparks of static electricity which could cause an explosion.


***Not for use with plastic pumps or ODP/ENC motors.**

DESCRIPTION	PRICE CODE NO.
2 ground cables, 6' long w/ clamps. 1 bond cable, 10' long w/ clamps. 1 ground cable, 1' long w/ clamp for drum.	55-0247

WALL BRACKET 304 Stainless Steel

A wall bracket is recommended for every pump. Proper storage will increase lifetime of the unit.

PRICE CODE NO.
55-0265

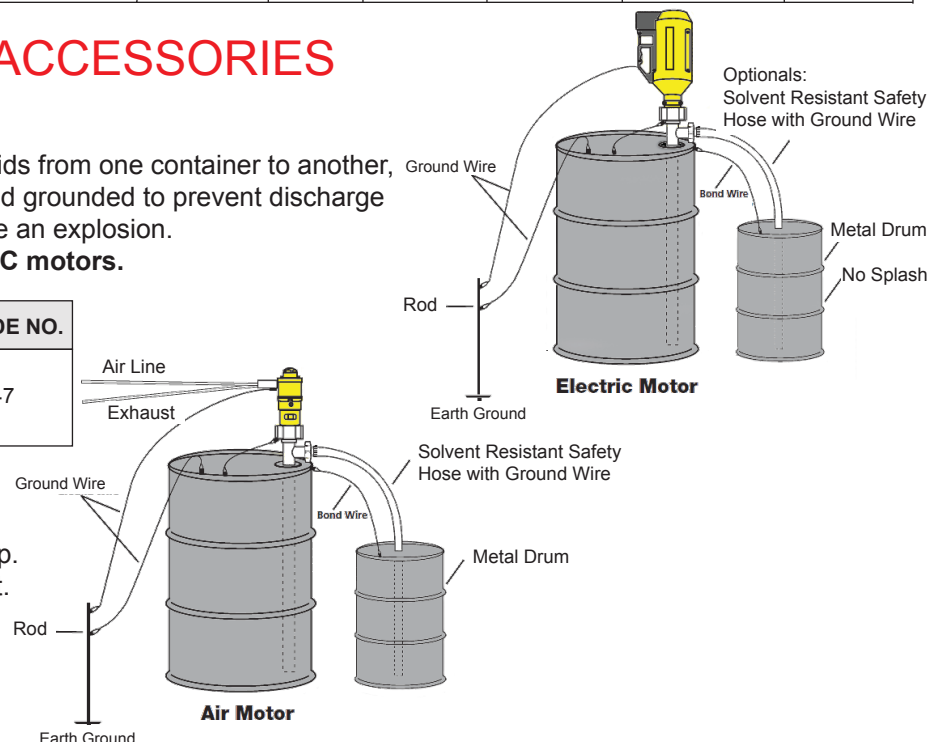



SERIES 'DP': DRUM PUMPS

ACCESSORIES cont.

DISCHARGE HOSE	DESCRIPTION	PRICE CODE NO.
Clear PVC	Per foot 1" I.D x 1.25" O.D. (25mm x 32mm) 150°F (66°C) / 30 psi (2.1 bar)	55-0274
Clear PVC • Nylon Reinforced	Per foot 1" I.D x 1.25" O.D. (25mm x 32mm) 150°F (66°C) / 75 psi (5.2 bar)	22-0432
Goodyear® FABCHEM™ • WHMW Polyethylene	Per foot 1" I.D x 1.47" O.D. (25mm x 37mm) 150°F (66°C) / 200 psi (14 bar) For Flammable / Combustible Liquids	52-9034
Goodyear® VIPER 16™ • Cross-Linked Polyethylene	Per foot 1" I.D x 1.45" O.D. (25mm x 36mm) 250°F (121°C) / 200 psi (14 bar)	52-9044
Stainless Steel Flex Hose	3/4" FNPT x 3/4" MNPT x 8' Long	22-0539-A
Discharge Adapter 316SS	3/4" MNPT	55-6095
PTFE Ribbed Hose	1" I.D. (25mm) x 8' Long	22-0463

HAND NOZZLE

Provides controlled dispensing of liquid without splashing for safe chemical transfer. Ideal for dispensing to small containers, the nozzle features full one inch flow-through for maximum flow and allows hand held squeeze control for corrosive applications.



52-0017

BARREL ADAPTERS / FUME BARRIERS

Provides controlled dispensing of liquid without splashing for safe chemical transfer. Ideal for dispensing to small containers, the nozzle features full one inch flow-through for maximum flow and allows hand held squeeze control for corrosive applications.



99-0107-A

99-0108-A

99-0157

DESCRIPTION	PRICE CODE NO.
Polypropylene / Viton®	52-0017
316SS / PFTE	52-0017-S
PVDF / Viton®	52-0017-K
Aluminum / Buna	52-0017-A

DESCRIPTION	PRICE CODE NO.
PP 2" NPT	99-0107-A
PE 2" BUTTRESS THREAD	99-0108-A
316SS 2" NPT	99-0157

SUCTION STRAINER

Recommended when pumping dirty liquids or where abrasive particles are present.



55-0282-A

DESCRIPTION	PRICE CODE NO.
Polypropylene	55-0282-A
316 Stainless Steel	55-0283-A (43mm) 55-0283-B (39mm)
PVDF	55-0284

DESCRIPTION	PRICE CODE NO.
PP / EPDM 2" NPT	52-9018
316SS / EPDM 2" NPT	52-9019