


SERFILCO®

SERIES 'S' DIESEL DRIVEN SELF-PRIMING CENTRIFUGAL PUMP


BULLETIN
P-623
MAY, 1992

SERFILCO Series 'S' self-priming centrifugal transfer pump for marine, contractor and other applications where fresh or salt water is to be pumped. Standard model equipped with Buna N elastomers.

- 2" or 3" PORT SIZES
- UP TO 280 GPM FLOW OR 50 PSI WORKING PRESSURE
- 25 FT. SUCTION LIFT
- SELF-FLUSHING VOLUTE
- BUILT-IN CHECK VALVE
- MOUNTED ON RUBBER FEET FOR VIBRATION ABSORPTION

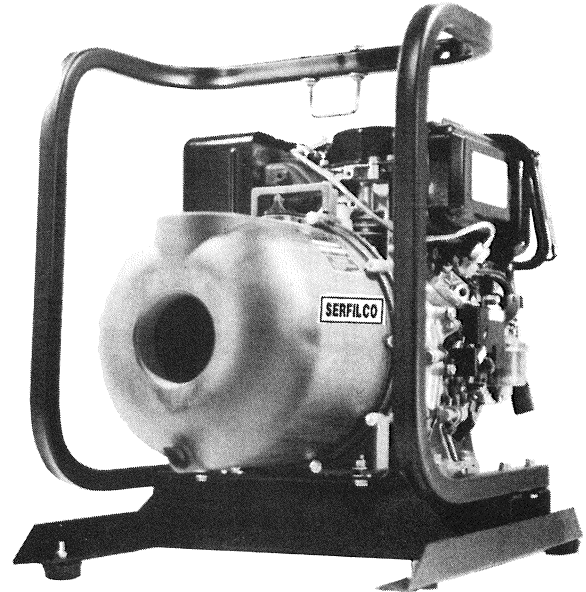

FLOW CURVES

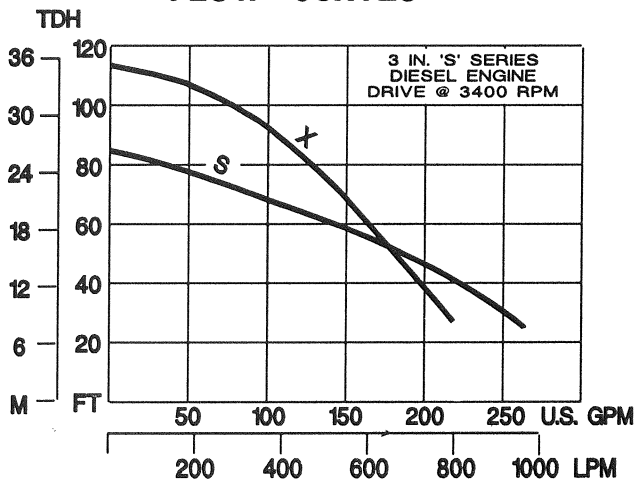

3" MODELS: SE3XB E5DC . . . See curve X
SE3SB E5DC . . . See curve S

Consult factory for 2" Model numbers and performances.


The SERFILCO Series 'S' pump, a proven performer in the market place, now teams up with a proven name in engines - "Wisconsin Robin", to provide a rugged, reliable combination to meet your pumping requirements.

This is a 5.5 H.P. diesel with overhead valve design, cast iron cylinder liner, mechanical decompression for easy starting, heavy duty air cleaner, full pressure lubrication system and a recoil starter.

By changing the elastomers in this pump to EPDM or Viton® it may also be used to pump a wide range of chemicals. Call toll-free with your applications.

Viton is a registered trademark of DuPont.

F.O.B. Northbrook, Illinois



SERFILCO, LTD.

1777 Shermer Rd. 708-559-1777
Northbrook, IL 60062-5360 U.S.A. 800-323-5431
Telex: 289557 SERFC UR FAX: 708-559-1995

DISTRIBUTED BY

Printed in U.S.A.